






Contractors Paving Supply, Inc. LLP.

13923 Stafford Road




Stafford, Texas 77477

Phone 281-208-8839 Fax 281-208-8809

sales@contractorspsi.com

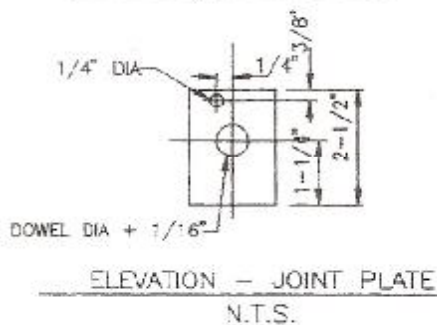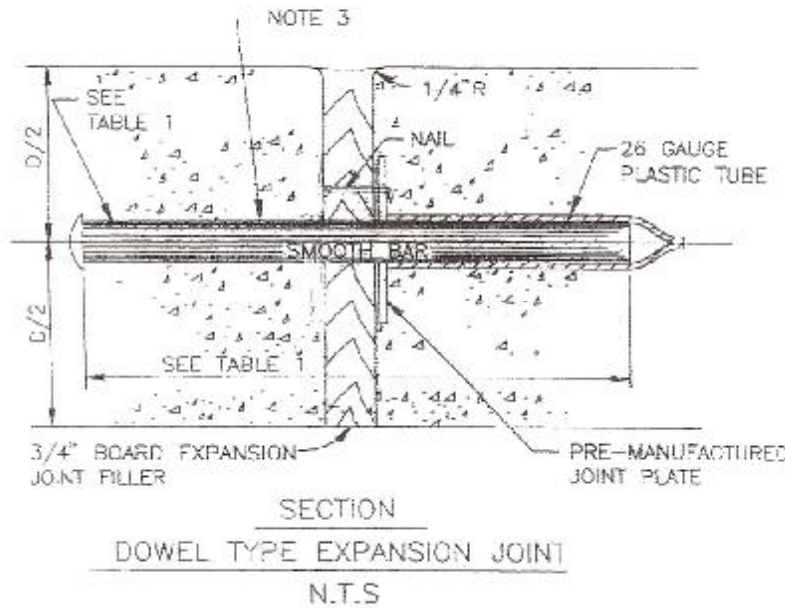

Paving Thickness (In.)	Dowel Sizes & Spacings		
	Diameter (In.)	Length (In.)	Spacing (In.)

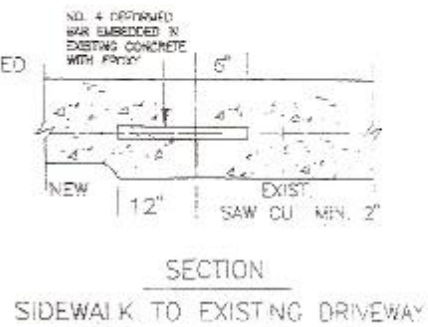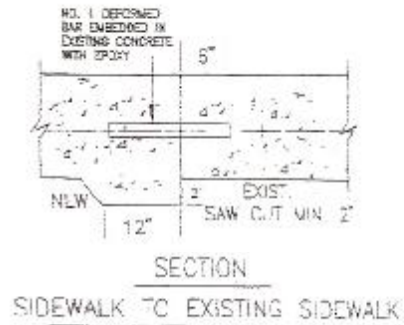

NOTES:

1. STEEL TO MEET ASTM STANDARD SPECIFICATION FOR CONCRETE REINFORCING BARS.
2. EXPANSION JOINT TO BE PLACED AT THE END OF EACH CURB RADUS AND SPACED AT A MAXIMUM DISTANCE OF 36' FEET. MAXIMUM SPACING FOR CONTROL JOINTS SHALL BE 5' F
3. CENTER DOWEL HORIZONTALLY ON JOINT.
4. CENTER DOWEL VERTICALLY IN CONCRETE AS NEEDED TO MAINTAIN 2" MIN. COVER.